



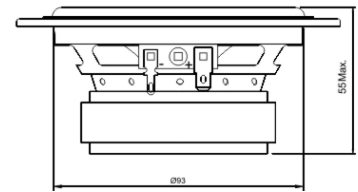

FULLRANGE 4" 8Ω 25W

Electrical


| | |
|-------------------------------|-------------|
| Nominal Impedance | 8 Ohms |
| Resonance Frequency | 110 Hz |
| Power Handling {IEC-268-5C} | 25 Watt |
| Long Term Power {IEC-268-5L} | 75 Watt |
| Short Term Power {IEC-268-5S} | 125 Watt |
| Sensitivity (2.83V/1m) | 90 dB |
| Resistance (DC) | 5.5 Ω |
| Qts | 0.81 |
| BL | 3.8 T-M |
| VAS | 1.44 Liters |

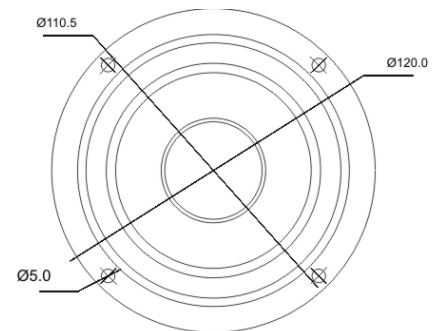

All Dimensions are in mm

Mechanical

| | |
|-------------------|------------------------------|
| Voice Coil Dia | 25 mm |
| Winding Width | 5.0 mm |
| Former | Aluminum |
| Layers | 2 |
| Wire Type | Copper |
| Magnet | 72 mm |
| Cone Material | Paper |
| Surround Material | Cloth |
| Chassis | Stamped Steel, Powder Coated |
| Dust Cap | Paper |

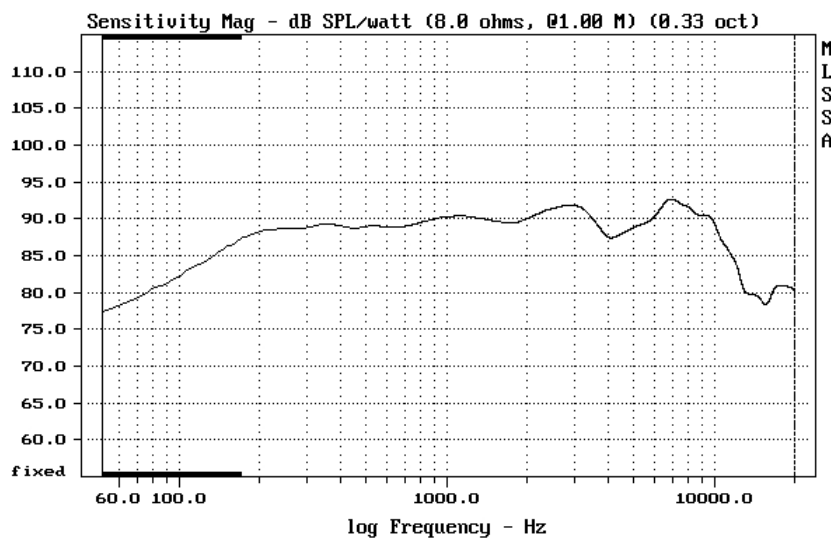

CURSOR: y = 77.4208 x = 51.7874 (14)