



FULLRANGE 8" 4Ω 15W


Electrical

Size	8"
Type	Full Range Speaker
Impedance	4Ω ±15% @ 600 Hz , 1 V
D.C. Resistance	3.7Ω ±10 %
Power handling Capacity	Nom (rms) = 15 W. Max=25W
Resonance Frequency	75 Hz ± 20 % @ 1 Volts
Sound Pressure Level	98 dB ±2 dB.
Frequency Range	Fo - 20 KHz
Load Test	White Noise @ 15 Watts for 100 Hrs.



Mechanical

Magnet Main	90 x 32 x 15 mm Barium Ferrite
Chassis	0.7mm Thick CRCA, Zn Plated
Yoke Plate	4.0 mm Thick CRCA, Zn Plated
Voice Coil	Ø25 mm , 2 Layers, Cu wire 0.18 mm SV, Kraft SV Former.
Lead Wire	Cu Braided Wire.
Cone	Paper
Surround	Corrugated Paper
Spider	Cloth
Gasket	Rubber

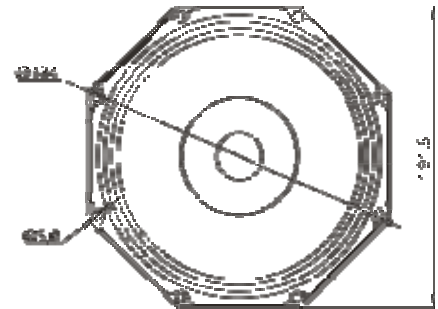

All Dimensions are in mm

